China

CE,

A36.3601

5~20 Days

5000 pcs/ Month

CNOEC, OPTO-EDU

FOB \$1~1000, Depend on Order Quantity Carton Packing, For Export Transportation

Stereo Electron Measurement 0.7-4.5x Zoom LED LCD Digital Microscope

Basic Information

- Place of Origin:
- Brand Name:
- Certification:
- Model Number:
- Minimum Order Quantity: 1 pc
- Price:
- Packaging Details:
- Delivery Time:
- Payment Terms: T/T, West Union, Paypal
- Supply Ability:



Product Specification

11.6" . LCD Screen: • Objective: 0.7-4.5x Zoom Objective, Zoom Ratio 6.4:1 • Magnification: 17x-110x • Working Distance: 100mm 1/2" COMS Camera Sensor: Resolution: 1920*1080p 60FPS 2.0M • Transmission Rate: . Light Source: LED Ring Light, With Switch On/Off, Brightness Adjustable. HDMI,USB,TF • Output: • Power: External Wide Range Adapter

digital usb microscope, portable digital microscope

OPTO-EDU

More Images

• Highlight:





for more products please visit us on cnoec.com



OPTO-EDU (BEIJING) CO., LTD.

OPTO-EDU

F-1501 Wanda Plaza, No.18 Shijingshan Road, Beijing 100043, China Tel:+8610 88696020 Fax:+8610 88696085

A36.3601

11.6" LCD Digital Measure Stereo Microscope, 110x 5.0M



A36.3601 Details

OPTO-EDU

A36.3601 LCD stereo microscope

The A36.3601 series integrated zoom optical module with high definition camera. It can be conveniently used in a narrow and small space. According to ergonomic principles, its internal optical corner design and angle adjustment of the display screen, allow the operator to look at the display in a flat view. Through the HDMI HD interface, it can connect to another display simultaneously.

Our Product Introduction




A36.3601 LCD Digital Stereo Microscope Specification					
Magnification	17X-110X				
Objectives	0.75X-4.5X stereo zoom, zoom ratio 6.4:1				
Display	11.6Inch, 1920H*1080V, IPS screen, detachable				
Imaging sensor	1/2.8Inch SONY CMOS				
Real-time image frame rate	60fps@1920*1080				
Photograph	5 Mega-pixel				

Recording	45fps@1920*1080				
Output Interface	HDMI				
Input Interface	Double USB2.0				
Camera Parameters	Exposure, White-				
	balance, Gain, Gamma, Brightness, Contrast, Hue, Saturation, Gray				
OSD Operation	Mouse				
Storage Function	Snap, Record, USB Storage				
Measurement	Point,Line,Parallel lines,Broken lines,Angle,Diameter circle,Radius circle,Three- point circle,Distance from circle to line,Concentric circles,Double circle,Vertical line,Arbitrary line,Polygon,Arc,Mark,Screenshot,Table data export,Calibration,Parameter Settings				
Other Functions	Flip horizontally, Flip vertically, Freeze				
Scale Ruler	3 kinds, customizable colors, line widths, display switches				
Grid Lines	8 group, customizable colors, line widths, display switches				
Languages	Simplified Chinese, Traditional				
	Chinese,English,French,Russian,Japanese,Italian,German				
Auxiliary Lens	0.5x				
	2.0x				
Light Source	56-LED ring light, brightness adjustable				
Base	Various bases are available according to customers' requirements				

A36.3601 Software

OPTO-EDU

A36.3601 LCD Stereo Microscope With Menu To Take Photo, Video. Adjust Parameter, and Measure, Controlled By Mouse.

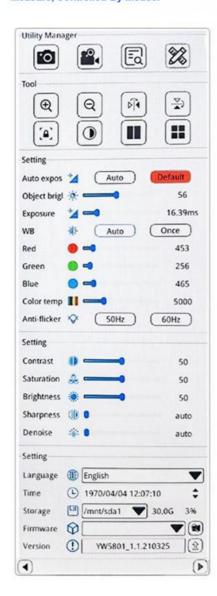

Utility Manag	er		
0			28
Tool		Measu	rement
(Q)	Q ()		
Measuring too	bl		
			€ € T
Calibration			+)(1)(2)
Item 📿			
Name	0.	7x.	
Length	8,0	00	mm 🔻
Pixel	934	002	рх
Scale	0.00	(mm/px	
Grid			
Enable all	Grid	reset) (Scale
Group A	Vlin		TEnable
Color	∎ ▼ lin		-
Measurement	t attribute		
Line colc		Line wid	2 (+)(-)
Font cold	and the second second		
		Font size	20 (+)(-)

- D Image capture: Click and capture image.
- Video: Click and record video.
- Preview: Click and view the captured image and video.
- Setting: Click and enter the setting interface.
- ليتعتب Measurement: Click and enter measuring interface.



A36.3601 Optional Accessories





0.5X Auxiliary 0.5X



Auxiliary 2X

A36.3601 LCD Digital Stereo Microscope Optical Data Sheet									
Objective	Standard		Auxiliary 0.5X		Auxiliary 2X				
W,D.	100mm		165mm		30mm				
11.6"	Mag	View Field	Mag	View Field	Mag	View Field			
	17.2x-110.5x	18.5x10.5-2.8x1.5	8.6x-55.2x	37.5x21-5.5x3.0	34.4x-221x	9.5x5.5-1.5x0.7			



